


POWER SUPPLY / TRANSFORMER SPECIFICATIONS

Description	Input Volts (Vac)	Input Freq (Hz)	Power Max (W)	Output Voltage (Vdc)	Output Current (A dc)	Working Temp (deg C)	Working Rh	Weight (kg/lbs.)
Power Supply, AC/DC, Single Output	120 +/- 10%	50/60	30	12	2.5	-30 to 40	NON-CONDENSING	0.22/0.48

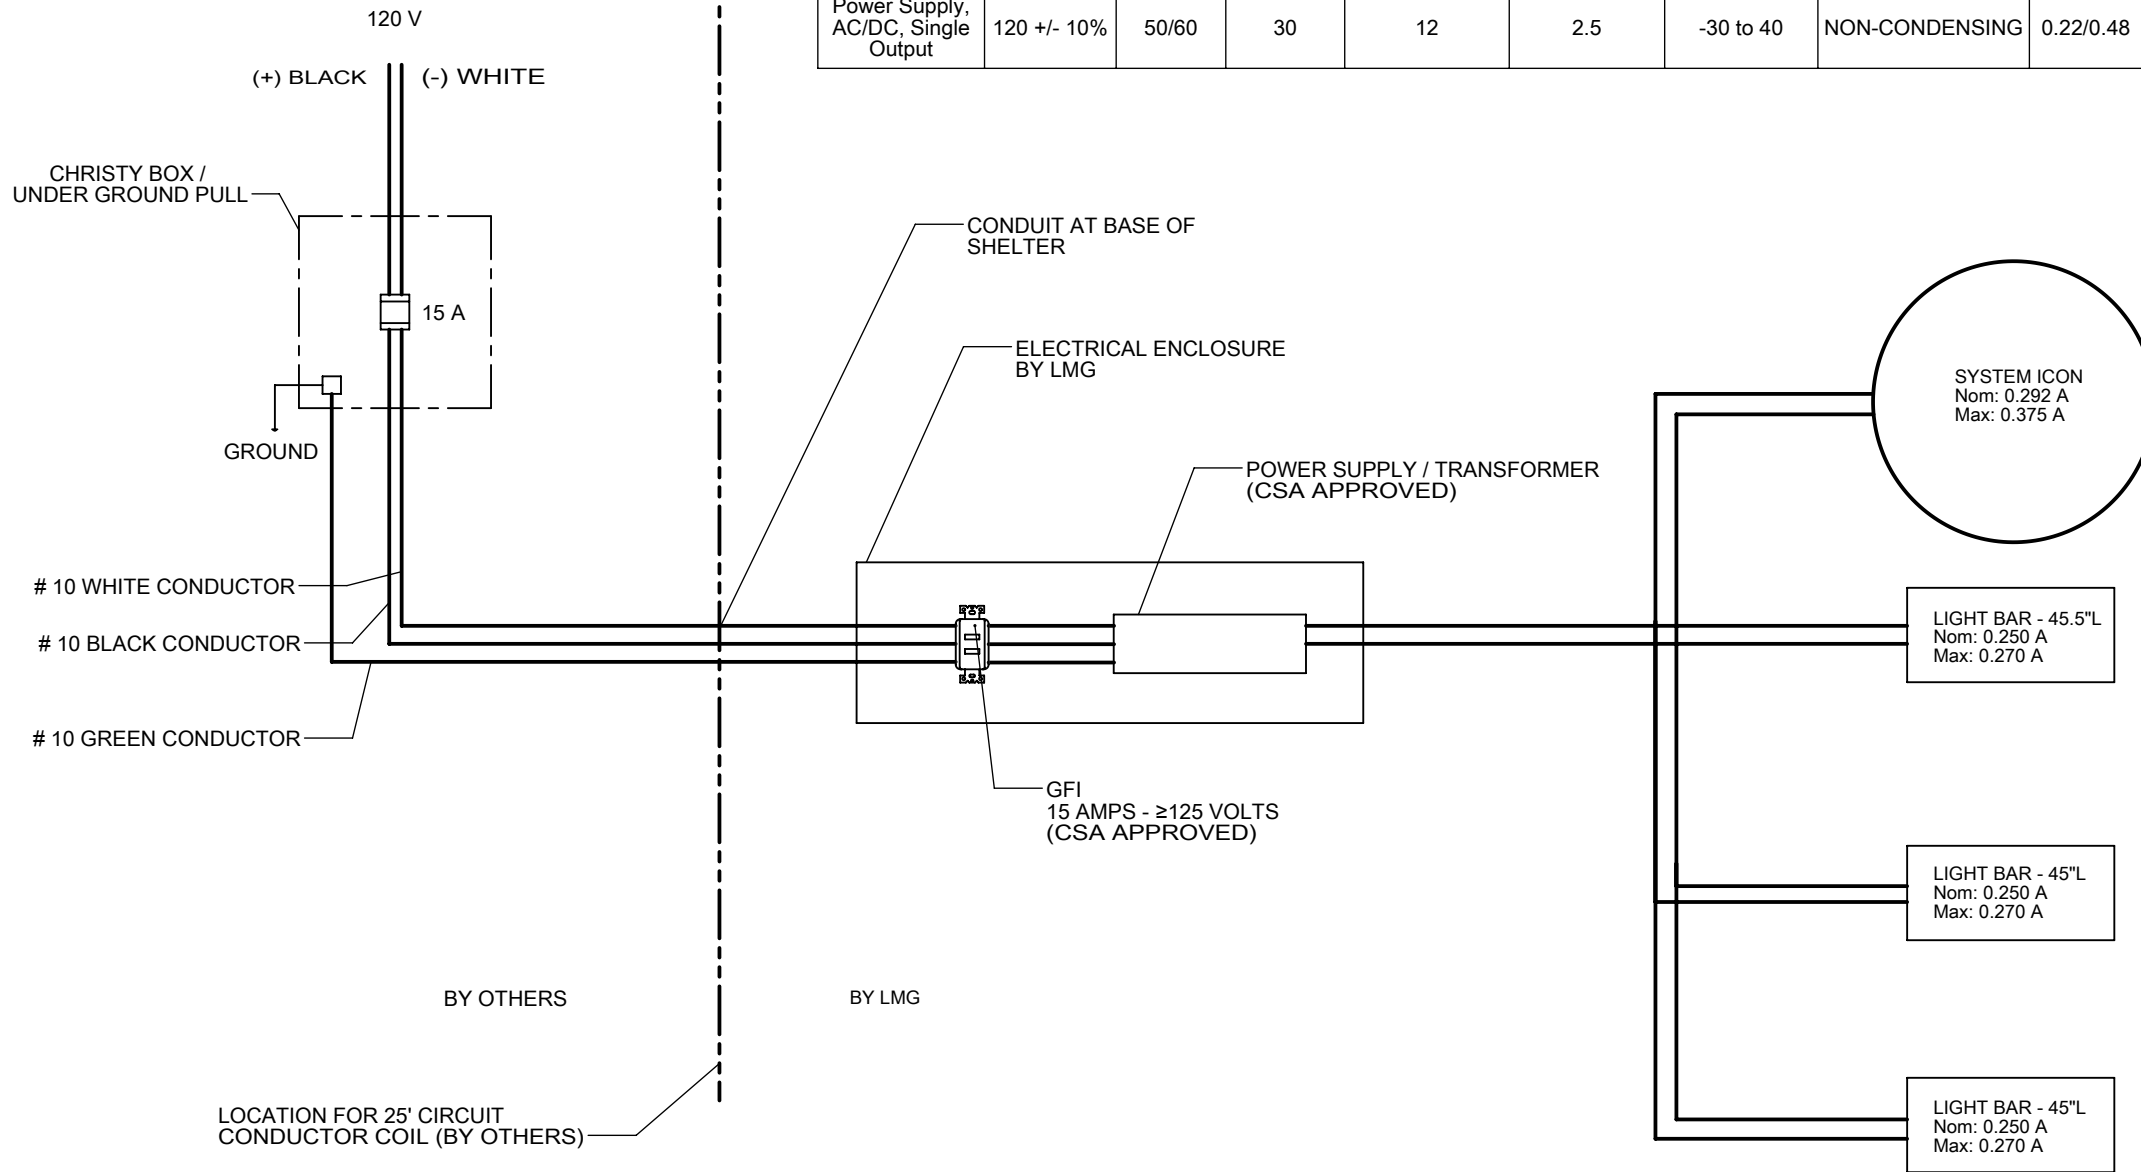

CUSTOMER APPROVAL

DATE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUCID MGMT GROUP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LUCID MGMT GROUP IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED

- INTERPRET DRAWING PER ASME Y14.5-2009
- INTERPRET MODEL PER ASME Y14.41-2003
- UNTOLERANCED DIMENSIONS ARE BASIC
- DIMENSIONS ARE IN INCHES
- GENERAL TOLERANCE

REFER TO ACCOMPANYING P.O FOR SPECIFIC INSTRUCTIONS


DO NOT SCALE DRAWING

PART NAME	PART REVISION
1006019	A.01

DRAWN BY	GURU
STATUS	PRELIMINARY
DATE	27-11-2015

APPROVALS IN PDM DATABASE

THIRD ANGLE PROJECTION



PRODUCT	: TRANSIT SHELTER
PART TYPE	: ELECTRICAL SCHEMATIC
SALES	: DARREN PENNER
WEIGHT [LBS]:	N/A
SCALE	: 1:2
SHEET	: 1 of 1

DWG#: **1006019** REV **A.01**

TITLE: ELECTRICAL SCHEMATIC
(3) 45.5 LED LIGHT BAR & (1) LIT SYSTEM ICON